

HL62F/1


Krovni slivnik DN110 vertikalni sa PP prirubnicom



Krovni slivnik DN110 vertikalni sa toplinski izoliranom stijenkom, PP prirubnicom za lijepljenje (varenje) sa FPO-folijama na bazi PP-a i hvatačem lišća d 180 mm. Građevinska zaštita sadržana u isporuci.



tehnički crtež

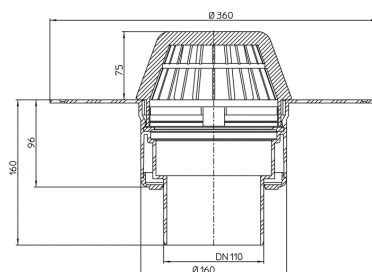

GLAVNI PODACI

rezervni (nadoknadni) dijelovi



HL062.1E
Hvatač lišća



HL170
Plitki hvatač lišća d 150mm

pribor



HL160
Prsten za odvodnjavanje d 150mm



HL170
Plitki hvatač lišća d 150mm



HL635
Drenažni šaht 362x362mm/240x240mm aluminij



HL66
Nastavni element d 145mm/okvir od INOXA 150x150mm (V4A)/138x138mm (V4A) pričvršćen vijcima



HL01058D
Protupovratna brtva za prirubnicu od INOXA 220x155mm



HL062B.3E
Noseći prsten



HL160
Prsten za odvodnjavanje d 150mm



HL66.1
Nastavni element d 145mm/okvir od INOXA 150x150mm (V4A)/138x138mm (V4A) pričvršćen vijcima i protuklizni



HL01058D
Protupovratna brtva za prirubnicu od INOXA 220x155mm



HL062B.3E
Noseći prsten



HL160
Prsten za odvodnjavanje d 150mm



HL66.9
Nastavni element d 145mm sa žlijebovima/148x148mm/138x138mm



HL062B.3E
Noseći prsten



HL160
Prsten za odvodnjavanje d 150mm



HL67
Uljevni element okrugli d 145 mm/okvir od nehrđajućeg čelika d 155 mm (V4A)/ d 145mm



HL01058D
Protupovratna brtva za prirubnicu od INOXA 220x155mm



HL062B.3E
Noseći prsten



HL160
Prsten za odvodnjavanje d 150mm

izmjenjivi dijelovi



HL62.1BF/1
Krovni slivnik vertikalni za FPO hidroizolaciju i grijačem, INOX -148x148mm/137x137mm



HL62.1F/1
Krovni slivnik DN110 vertikalni sa PP-prirubnicom i grijačem (10-30W/230V)



HL62/1
Krovni slivnik DN110 sa prirubnicom od INOXA i hvatačem lišća

nadogradni elementi



HL350

Nastavni element 130mm/d 145mm



HL350.1

Nastavni element 180mm/d 145mm s brtvenom prirubnicom i izolacionom garniturom HL84



HL350.1H

Nastavni element 180mm/d 145mm s bitumenskom prirubnicom



HL65

Nastavni element 300 mm za krovni slivnik, DN125 sa brtvenom prirubnicom i INOX stezaljkom za spajanje sa hidroizolacionim folijama



HL65H

Nastavni element 300 mm za krovni slivnik, DN125 sa bitumenskom prirubnicom



HL65P

Nastavni element 345mm/d 125mm sa PVC-prirubnicom

TEHNIČKI PODACI

materijal	PP	visina ugradnje
dimenzija (mjera)	DN110	nastavak (umetak)
učinak / kapacitet	7,85 l/s	rešetka dotoka
težina	0,68	klasa opterećenja
EAN	9003076031726	dotok
		norme

PODACI O PAKIRANJU

karton, kutija

mjerna jedinica pakiranja	1 [kom. (komad)]
težina	1,16 [kg]
EAN/ pakiranje	9003076031726
visina/širina/dubina	180/385/385 [mm]
obujam (volumen)	0,0266805 [m ³]

jednokratna paleta

mjerna jedinica pakiranja	60 [kom. (komad)]
težina	80 [kg]
EAN/ pakiranje	
visina/širina/dubina	2100/800/1200 [mm]

obujam (volumen) 2,016 [m³]

DOWNLOADS

TLAK	HL62F_pr.tif	max.
oglas (WEB)	HL62F_B.jpg	640x480/300dpi
Foto Symbol	HL62F_gr.jpg	150x150/72dpi
tehnički crtež	HL62F_1_b.pdf	pdf
CAD	HL62F_1_2_b.dxf	dxf
primjer ugradnje	HL62F_1_PZ.pdf	pdf