

HL62.1FSafe/1


Sigurnosni krovni slivnik DN110 sa PP-prirubnicom, grijačem i po visini podešavajućim uljevom



Sigurnosni krovni slivnik vertikalni DN110 sa PP-prirubnicom, grijačem i po visini podešavajućim uljevom 28-68mm.



tehnički crtež

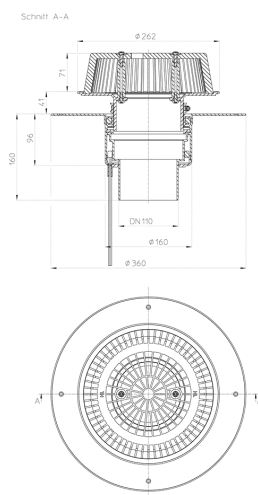

GLAVNI PODACI

rezervni (nadoknadni) dijelovi



HL062.1Safe

Hvatač lišća za sigurnosne slivnike



HL170

Plitki hvatač lišća d 150mm

izmjenjivi dijelovi

**HL62.1Safe/1**

Sigurnosni krovni slivnik DN110 sa grijačem i po visini podešavajućim uljevom

nadogradni elementi**HL65**

Nastavni element 300 mm za krovni slivnik, DN125 sa brtvenom prirubnicom i INOX stezaljkom za spajanje sa hidroizolacionim folijama

**HL65H**

Nastavni element 300 mm za krovni slivnik, DN125 sa bitumenskom prirubnicom

**HL65P**

Nastavni element 345mm/d 125mm sa PVC-prirubnicom

TEHNIČKI PODACI

materijal	PP	visina ugradnje	100mm
dimenzija (mjera)	DN110	nastavak (umetak)	
učinak / kapacitet	see Download	rešetka dotoka	Laubfangkorb d 262 mm
težina	3,391	klasa opterećenja	
EAN	9003076040711	dotok	
		norme	

PODACI O PAKIRANJU**karton, kutija**

mjerna jedinica pakiranja	1 [kom. (komad)]
težina	4,391 [kg]
EAN/ pakiranje	9003076040711
visina/širina/dubina	385/385/385 [mm]
obujam (volumen)	0,057066625 [m ³]

DOWNLOADS

TLAK	HL62FSafe_pr.tif	max.
oglas (WEB)	HL62FSafe_B.jpg	640x480/300dpi
Foto Symbol	HL62FSafe_gr.jpg	150x150/72dpi
tehnički crtež	HL62.1FSafe-1_1_a.pdf	pdf
CAD	HL62.1FSafe-1_2_a1.dxf	dxf
sonstiges	H62FSafe_Capacity.pdf	Capacity / Abflussleistung